


Catalog Number	Dimensions	Lamps Operated	Lumens
----------------	------------	----------------	--------

Stocked in Berkeley, CA

B30

16.3" L x 5.5" W x 1.7" H (2'-8") T8, T9, T10, T12 and (4-pin) twin, quad or triple twin-tube & long compact fluorescent lamps

1450-3500 lm

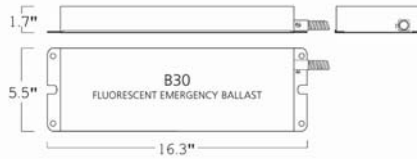

LAMP DIAMETER	BASE TYPE	WATTAGE (LENGTH)	NO. OF LAMPS (EMERGENCY MODE)
T8, T9, T10, T12 (1", 1-1/4", 1-1/2")	SINGLE OR BI-PIN	17 - 40 W (2' - 4')	1
		40 - 215 W (5' - 8')	2
LONG COMPACT	4-PIN (2G11)	18 - 39 W	1
		40 - 55 W	2
		40 - 55 W	1
TWIN/QUAD/TRIPLE/QUADRUPLE TWIN-TUBE COMPACT	4-PIN (G24q, GX24q)	18 - 42 W	1
		18 - 42 W	2
2D	4-PIN (GR10q)	16 - 38 W	1
		55 W	2
		55 W	1


LAMP	TOTAL LUMENS	
	1 LAMP	2 LAMPS
F025, F8024 T8	2250	2600
F032, F8031 T8	3000	3000
F40 T8	2400	
F096 T8	3000	
F40 T12, F40/U	3000	3000
F40 T12ES (34W)	2700	2700
F48 T12/HO	3000	
F96 T12	2800	
F96 T12/HO	2900	
F96 T12/VHO	3300	
PL-L 24W, F27/24BX, DULUX L 27W	1800	2300
PL-L 36W, F39/36BX, DULUX L 39W	2900	3500
PL-T 42W/4P	3200	3500
PL-L 40W, F40/30BX, F50BX, DULUX L 55W	1800	
F282D/4P	2050	2800
F382D/4P	2800	2800

Catalog Number	Dimensions	Lamps Operated	Lumens
----------------	------------	----------------	--------

B50

13.3" L x 2.4" W x 1.5" H (2'-8") T8, T9, T10, T12 and (4-pin) long compact fluorescent lamps

1100-1400 lm

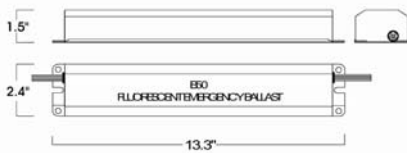

LAMP DIAMETER	BASE TYPE	POWER (LENGTH)	# OF LAMPS EMERGENCY
1", 1-1/4", 1-1/2" (T8, T9, T10, T12)	SINGLE OR BIPIN	17 - 40 W (2'-4')	1
		40 - 215 W (5'-8')	2
LONG COMPACT	4-PIN (2G11)	18 - 39 W	1
		40 - 55 W	2
		40 - 55 W	1
COMPACT	4-PIN (G24q, GX24q)	18 - 42 W	1
		18 - 42 W	2


LAMP	LUMENS	
	1 LAMP	2 LAMPS
F025, F8024 T8	1250	1100
F032, F8031 T8	1350	1350
F096 T8	1400	
F017, F8016	1050	950*
F40T12, F40/U	1100	1100
F48T12/HO	1200	
F96T12, HO, VHO	1100	
F39/36BX, PL-L 36 W, DULUX L 39 W	1100	1100
F28 2D/4P	1100	1100
F38 2D/4P	1000*	1100
F27/24BX, PL-L 24 W, DULUX L 27 W		1000*
F40T12/ES (34 W)	975*	975*
PL-L 40 W, F40/30BX, F50BX, PL-L 50 W, DULUX L 55 W	900*	

Catalog Number	Dimensions	Lamps Operated	Lumens
----------------	------------	----------------	--------

B90

9.4" L x 2.4" W x 1.5" H (2'-8") T8, T9, T10, T12 and (4-pin) long compact fluorescent lamps

500-600 lm

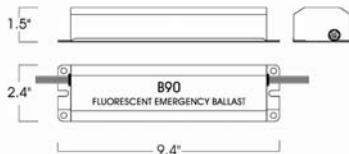


LAMP DIAMETER	BASE TYPE	POWER (LENGTH)	# OF LAMPS EMERGENCY
1", 1-1/4", 1-1/2" (T8, T9, T10, T12)	SINGLE OR BIPIN	17 - 40 W (2'-4')	1
		40 - 215 W (5'-8')	1
LONG COMPACT	4-PIN (2G11)	18 - 39 W	1
		40-55 W	1

Catalog Number	Dimensions	Lamps Operated	Lumens
----------------	------------	----------------	--------

B94C

9.4" L x 2.4" W x 1.5" H (4-pin) twin, quad, triple twin, quadruple twin, long compact and 2D lamps

300-750 lm

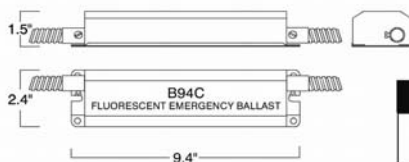


LAMP DIAMETER	BASE TYPE	POWER (LENGTH)	# OF LAMPS EMERGENCY
1", 1-1/4", 1-1/2" (T8, T9, T10, T12)	SINGLE OR BIPIN	17 - 40 W (2'-4')	1
		40 - 215 W (5'-8')	1
LONG COMPACT	4-PIN (2G11)	18 - 39 W	1
		40-55 W	1

LAMP TYPE (4-PIN)	LUMENS	
	1 LAMP	2 LAMPS
PL-T 42 W/4P, DULUX T/E 42 W	750	
PL-T 32 W/4P, DULUX T/E 32 W	575	750
PL-T 26 W/4P, DULUX T/E 26 W, F26TBX/4P	450	725
PL-T 18 W/4P, DULUX T/E 18 W, F18TBX/4P	300	525
PL-C 26 W/4P, DULUX D/E 26 W, F26DBX/4P	600	700
PL-C 18 W/4P, DULUX D/E 18 W, F18DBX/4P	475	575
PL-C 13 W/4P, DULUX D/E 13 W, F13DBX/4P	350	425
PL-L 40 W, DULUX L 40 W, F40/30BX/4P	650	
PL-L 36 W, DULUX L 39 W, F39/36BX/4P	575	750
PL-L 24 W, DULUX L 27 W, F27/24BX/4P	475	550
PL-L 18 W, DULUX L 18 W, F18 BX	300	400
F382D/4P	525	650
FQL 28	600	700

Catalog Number	Dimensions	Lamps Operated	Lumens
----------------	------------	----------------	--------


B100 9.4" L x 2.4" W x 1.5" H (2'-8") T8, T9, T10, T12 and (4-pin) long compact fluorescent lamps 350-450 lm

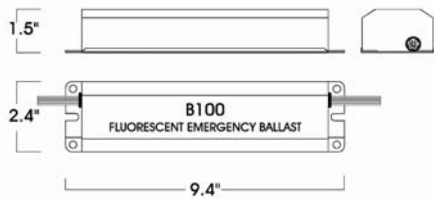

LAMP DIAMETER	BASE TYPE	POWER (LENGTH)	# OF LAMPS EMERGENCY
1", 1-1/4", 1-1/2" (T8, T9, T10, T12)	SINGLE OR BIPIN	17 - 40 W (2'-4')	1
		40 - 215 W (5'-8')	1
LONG COMPACT	4-PIN (2G11)	18 - 39 W	1
		40-55 W	1

Catalog Number	Dimensions	Lamps Operated	Lumens
----------------	------------	----------------	--------

LP550 18.5" L x 1.18" W x 1.18" H Standard or high output T5s & T8s 390-700 lm

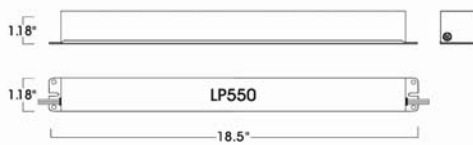


LAMP	BASE	WATTAGE (LENGTH)	NO. OF LAMPS (EMERGENCY)
T5/HO	MINIATURE BIPIN	24 - 54 W (2'-4')	1
T5	MINIATURE BIPIN	14 - 28 W (2'-4')	1
LONG COMPACT	4-PIN (2G11)	36 - 55 W	1
T8	BIPIN	32 W (4')	1
		40 W (5')	1
T8/HO	BIPIN	44 W (4')	1

LAMP	LUMENS
FP54, F54T5/HO	700
FP39, F39T5/HO	620
FP24, F24T5/HO	390
FP28, F28T5	700
FP21, F21T5	620
FP14, F14T5	430
F32T8 (4')	635
F40T8 (5')	570
F48T8/HO (4') (44 W)	470
PL-L 50W, F50BX/RS, Dulux L 55W	510
PL-L 40W, F40/30BX, Dulux L 40W	625
PL-L 36W, F39/36BX, Dulux L 36W	610

Catalog Number	Dimensions	Lamps Operated	Lumens
----------------	------------	----------------	--------

LP600 21.5" L x 1.18" W x 1.18" H Standard or high output T5s & T8s 600-1325 lm

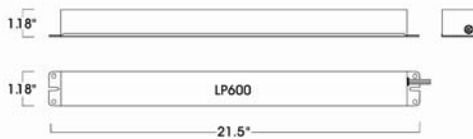

LAMP	BASE	WATTAGE (LENGTH)	NO. OF LAMPS (EMERGENCY)
T5/HO	MINIATURE BIPIN	24-54 W (2'-4')	1
T5	MINIATURE BIPIN	14-28 W (2'-4')	1
	BIPIN	44 W (4')	1
T8/HO	RECESSED DC	44 - 55 W (4'-5')	1
		17 - 40 W (2'-5')	1
T8	BIPIN	17 - 40 W (2'-5')	1
LONG COMPACT	4-PIN (2G11)	36-55 W	1

LAMP	LUMENS
FP54, F54T5/HO	1230
FP39, F39T5/HO	1125
FP24, F24T5/HO	725
FP28, F28T5	1245
FP21, F21T5	1025
FP14, F14T5	750
F17T8	650
F25T8	750
F32T8 (4')	1100
F40T8 (5')	1325
F48T8/HO (4', 44 W)	1100
F60T8/HO (5', 55 W)	1275
PL-L 50W, F50BX/RS, FT55DL	1050
PL-L 40W/RS, F40/30BX, FT40DL/RS	925
PL-L 36W, F39/36BX, FT36DL	900